

MATERIALS AND FINISHES

EXISTING ‘MAIN HOUSE’

WD2 EXISTING ROOF REPLACEMENT WOOD SHINGLES




Dulux-Deep Charcoal or similar

Stained Cedar Shingle

MT1

PT1 CLAPBOARD SIDING AND BRICK

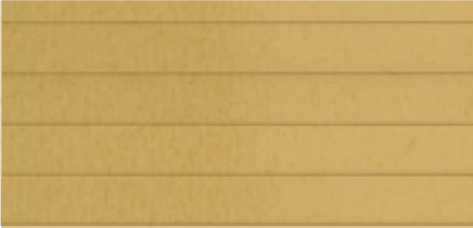


Dulux - DLX1107-7 or similar

PT2 TRIM/FASCIA




Dulux - DLX1107-6 or similar

PT3 TRIM/FASCIA



Dulux -DLX1001-7 or similar


PT4 TRIM/FASCIA



Dulux - DLX1002-5 or similar

PROPOSED

WD1 BOARD AND BATTEN CLADDING

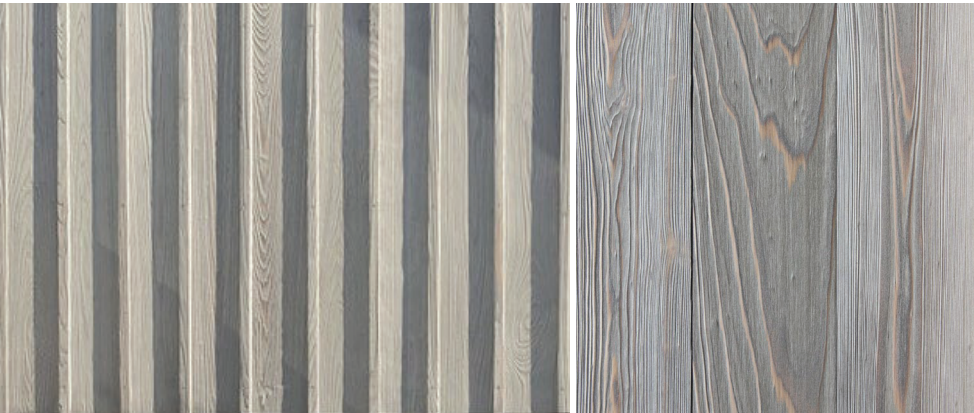


RESAWN Iruka Shou Sugi Ban Charred Cypress - Board and Batten Installation

AC1 ARCHITECTURAL CONCRETE



Caste-in-Place Concrete

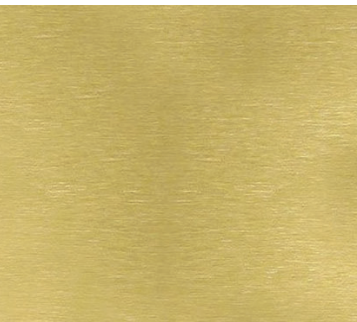

Natural Brass Sheet Metal

GL1 GLAZING



Grey Tent - Vision Glass Bird-Friendly Treatment (where applicable)

GL2 GLAZING



Grey-Spandrel Glass

